




Front Elevation (1 : 20)

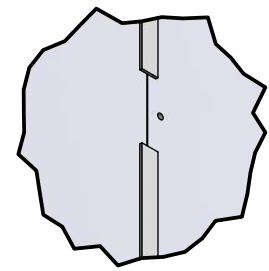

A (1 : 15)

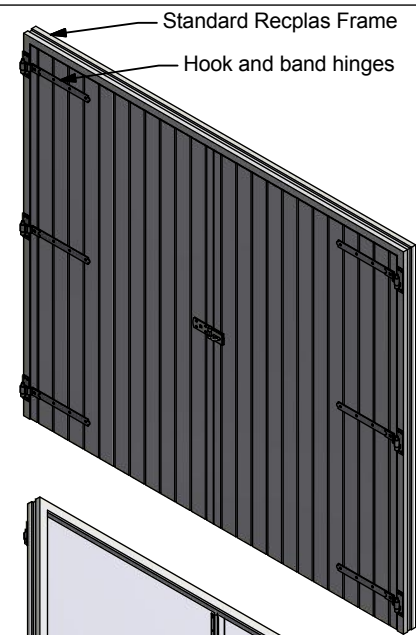

All ferrrous components to be hot dipped galvanised

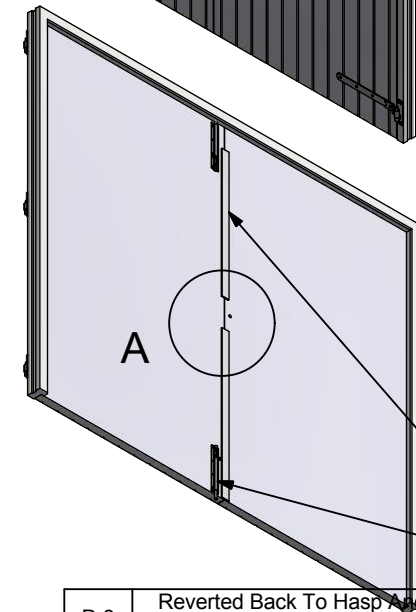

garage door stays to be fitted to back of doors. (NOT SHOWN) Supplied seperately to be fitted by others

Door stop to back of slave door
250mm barrell bolts to top and bottom of slave door

D.3	Reverted Back To Hasp And Staple	18/07/2017	P O
D.2	3 Point Lock Added	16/04/2014	P O
D.1	1st vault Production Issue	20/01/2014	P O
D	1st vault Issue	20/01/2014	P O
C	Add hinge note	20/01/2014	P O
B	hasp and staple shown	20/01/2014	P O
A	Garage Door Stay Added To Info	20/01/2014	P O
REV	DESCRIPTION	DATE	AUTHOR

REVISION HISTORY



Description
2495 x 2165 Substation Doors

Designed by
P O
Scale

Date
20/01/2014
Checked
GP

Manufacture Notes

Approved
PO
Manuf. App
DP

Date
20/01/2014
Manuf. App
18/07/2017

Drawing Number
050812
Sheet
1
Of
1
Revision
D.3